

Installation & Reference Guide for Installers


Procedure

1. Perform a vehicle check before starting installation.
2. Confirm vehicles and labels (i.e. "#001" [or] "Digger").
3. Complete installation & test equipment using the Temeda Native APP (Android/Apple).



Installation Instructions

- Mounting: Secure solar cover to device. Mount the device with the solar panels up or out, with best view of the sky possible. Do not mount in a high heat area or completely encased in metal. There are permanent (or) magnetic mount cradle options.

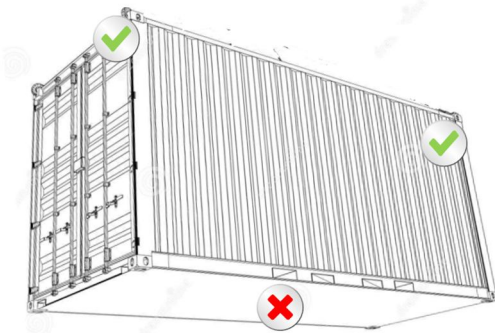

- Wiring (optional): Run wiring to the power connection location. Secure all loose wiring with tie straps or cable clamps. Power harness should be void of any moving objects. It is recommended to follow the factory wiring if possible on heavy equipment and trailers. You must use the provided fuse holders. The part number for the 2wire accessory is SPCB-104953.

RED (POS) + Constant Power Source [12/24VDC]

BLK (GND) Ground

Always connect ground first | T-Taps & Scotch locks are prohibited


Device Turn "ON"

- The 4950 must be turned on at 1st use. Place the provided Power Pawn Key over the bottom-left of the device for 3s (as shown). The red LED will begin to flash, followed by the Blue (network) and the green once GPS is acquired.

If you do not have a factory Power Key, a medium strength neodymium magnet will work.




L.E.D. Status

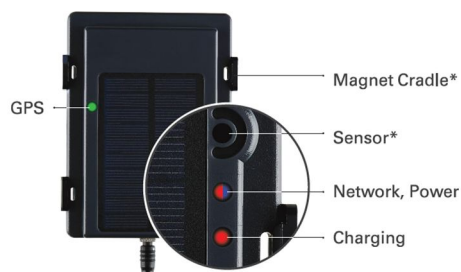

Device Testing & Account Log

1. Verify the LED(s) status are correct.
2. Open the Ascend Fleet Installation APP.
3. Follow all the prompts for Installation.
4. Use the Suntech ESN:

[i.e. 4002 - **0000000000** - 04.02]

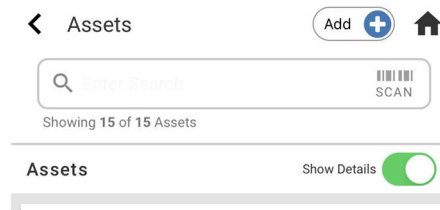

- Complete all APP fields for device to work
- Take the time to take good photos of the installation
- Note any issues and use the APP as it is designated

If you do not have access to the APP, contact customer service during business hours

Technical support can be reached at 844-4-TEMEDA. For additional resource manuals, including complete installation and user guides, go to www.help.temeda.com/install

Disclaimer: All information is provided as a resource for the installer. Any installer and/or user of this document assumes the entire risk as to the accuracy and use of this information contained. Please verify all wire colors, diagrams, and documentation before applying any information. Always use a digital multi-meter when testing wires/circuits. [R 12.12c]